

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**




#4

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

I hereby certify that this correspondence is being deposited with the U.S. Postal Service as first class mail in an envelope addressed to Commissioner of Patents and Trademarks, Washington, D.C. 20231 on September 28, 2001.

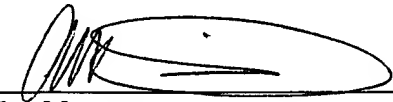
Alex Martinez

Applicant : Christopher Brian Latham, et al.
Application No. : 09/894,814
Filed : June 27, 2001
Title : DEVICE CONTROLLER AND CONTROL
ARRANGEMENT
Grp./Div. : 2635
Examiner : N/A
Docket No. : 45542/DBP/T183

**LETTER FORWARDING CERTIFIED
PRIORITY DOCUMENT**

Assistant Commissioner for Patents
Washington, D.C. 20231


Post Office Box 7068
Pasadena, CA 91109-7068
September 28, 2001

Commissioner:

Enclosed is a certified copy of United Kingdom patent Application No. 0015559.8, which was filed on June 27, 2000, the priority of which is claimed in the above-identified application.

Respectfully submitted,

CHRISTIE, PARKER & HALE, LLP

By 
D. Bruce Prout
Reg. No. 20,958
626/795-9900

DBP/aam
Enclosure: Certified copy of patent application



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

03 JUL 2001

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document.

Continuation sheets of this form

Description 5

Claims(s)

Abstract

Drawing(s) 1

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (Please specify)

11.

I/We request the grant of a patent on the basis of this application

Signature

Date 26/06/2000

W.P. Thompson & Co

12. Name and daytime telephone number of person to contact in the United Kingdom

R.J. BARTLE
0151-709-3961.

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes


- If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

27 JUN 2000

27 JUN 00 E547930-1 000335
P01/7700 0.00-0015559.8

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office
Cardiff Road
Newport
Gwent NP9 1RH

1.	Your reference	DII/RJB/P403282GB		
2.	Patent application number (The Patent Office will fill in this part)	0015559.8		
3.	Full name, address and postcode of the or of each applicant (<u>underline all surnames</u>) Patents ADP number (if you know it) If the applicant is a corporate body, give the country/state of its incorporation	Oxley Developments Company Limited, Priory Park, Ulverston, Cumbria, LA12 9QG. <i>6478442001</i> ENGLAND.		
4.	Title of the invention	DEVICE CONTROLLER AND CONTROL ARRANGEMENT.		
5.	Name of your agent (if you have one) "Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode) Patents ADP number (if you know it)	W.P.THOMPSON & CO. Coopers Building, Church Street, Liverpool, L1 3AB. 0000158001		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (Day/month/year)
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (Day/month/year)
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

DESCRIPTIONDEVICE CONTROLLER AND CONTROL ARRANGEMENT

The present invention is concerned with control of electrical and electronic devices.

A specific application of the present invention concerns aircraft lighting. The use of infra red sensitive viewing systems such as night vision goggles (NVGs) is making it necessary to retro-fit aircraft with exterior lights which are switchable between visible and infra red light emission. Infra red lighting, particularly on military aircraft, enables the aircraft to be visible to other aircraft flying using NVGs. The applicant's own granted U.S. Patent 6011493 describes a suitable light which can be substituted for a conventional light. It is necessary for the pilot to be able to switch, from the cockpit, between visible and infra red emission. Additionally it is desirable that the lighting should, under control from the cockpit, be able to flash in various on - off patterns to aid conspicuity in various flying conditions.

Typically existing aircraft wiring e.g. to wingtip lights, having been designed to drive only visible lighting, comprises only power supply and earth (or two electrical lines for an A.C. supply). Re-wiring to include further lines, to allow control and drive of two lights (visible and infra red) through separate lines would be complex and expensive so it is desirable to provide for the required control of both visible and infra red emitters using only the existing lines.

It is also desirable to provide for this control without need for separate

electronic control signals which could give rise to difficulties as concerns electromagnetic compatibility.

While the present invention has been devised to address the above requirements concerning aircraft lighting, it has numerous other applications. Broadly stated, the aim of the present invention is to provide for control of an electrical or electronic device through the device's power supply lines.

In accordance with a first aspect of the present invention, there is a controller for controlling a device driven by an AC supply, the controller being adapted to intermittently interrupt the AC supply such as to encode a control signal therein.

In this way the lines used to carry the AC supply itself can be made also to carry the signal required to control a remote device.

In accordance with a second aspect of the present invention there is a control arrangement for controlling a device, comprising an AC supply, a controller adapted to intermittently interrupt the AC supply such as to encode a control signal therein, an AC supply line for conducting the encoded AC supply to the device and a detector for receiving the AC supply, decoding the control signal and controlling the device in dependence thereupon.

The AC supply may for example be provided by connecting the controller to AC mains.

The controller and the control arrangement according to the present invention make it unnecessary to provide signals or power separate from the AC supply itself, reducing or removing any electromagnetic compatibility problems (an important

issue e.g. in the example of aircraft lighting) and making for a simple and convenient arrangement.

The controller and the control arrangement according to the present invention are particularly advantageous where, as in the aircraft lighting example, it is necessary to modify an existing circuit to provide for control of the device without adding new wiring to the device.

It is particularly preferred that the controller is adapted to begin and end interruptions of the AC supply when the supply potential is substantially zero. This is sometimes referred to as a "zero crossing" method. By carrying out switching when the potential is zero, or at least close to zero, it is ensured that no electromagnetic interference is produced.

Interruptions of the AC supply are preferably one AC cycle in duration. This is consistent with zero crossing.

It is particularly preferred that the controller is such as to interrupt the AC every X cycles, where X is adjustable and different values of X represent different control signals. The controller preferably receives control input (e.g. from switches controlled by a user) and adjusts X to correspondingly control the device.

According to an especially preferred embodiment of the present invention the control arrangement is for controlling exterior aircraft lighting. In such an embodiment the controller may be mounted in or adjacent to the cockpit and connected by the AC supply line to an exterior aircraft light provided with the detector. Preferably the aircraft light has a visible light emitter and an infra red

emitter both controllable by the controller.

A specific example of the present invention will now be described, by way of example only, with reference to accompanying Fig. 1 which is a simplified block diagram of a light control system according to the present invention.

The illustrated light control system is suitable for control of aircraft lights. It can be used to facilitate retro-fitting of switchable visible/infra red lights to existing aircraft using existing aircraft wiring originally intended for visible lights only.

As the drawing indicates, the control system comprises a controller in the form of a modulator 1 which modulates an AC supply taken from the aircraft mains. The modulator is under the control of the pilot (e.g. through cockpit mounted light switches) and modulates the AC supply such as to encode a control signal therein.

The modulator 1 is mounted in the vicinity of the cockpit. The modulated AC signal is conducted through existing aircraft wiring 3 to a light at a remote location on the aircraft, e.g. the wingtip. The wiring 3 need only include the existing lines intended to supply AC power to the light.

The modulated AC signal is led first to a detector 5 which is mounted in, or in the vicinity of, the light itself. The detector 5 comprises a microprocessor which decodes the control signal carried by the AC and in response thereto (and so under control from the modulator 1) selectively directs the AC to one of the light sources (an example of which is shown as an LED at 7) to provide the required light - visible, infra red, flashing etc.

The light sources themselves can use solid state visible and infra red LEDs.

Additionally or alternatively conventional incandescent bulbs may be used.

In the illustrated embodiment the modulator encodes the control signal by selectively removing one cycle of the AC supply every X cycles, where the ratio X is adjusted according to the control input from the pilot. The ratio X is monitored by the detector 5 which switches the light to different modes in response to different X values.

In the drawing, a removed AC cycle is shown in dotted lines. It can be seen that the removed cycle begins and ends at instants of zero supply potential ("zero crossing") so that there can be no possibility of electromagnetic interference being generated by the switching.

The arrangement described above is particularly suited to control of LED lighting on aircraft where electromagnetic interference issues can be safety critical and where the detector microprocessor can also conveniently include any necessary power regulation and temperature compensation.

However, the present invention could have many "non invasive" applications not only in 400Hz aircraft systems but also in mains systems (e.g. at 50Hz) and wherever relatively slow (msec) control is adequate.

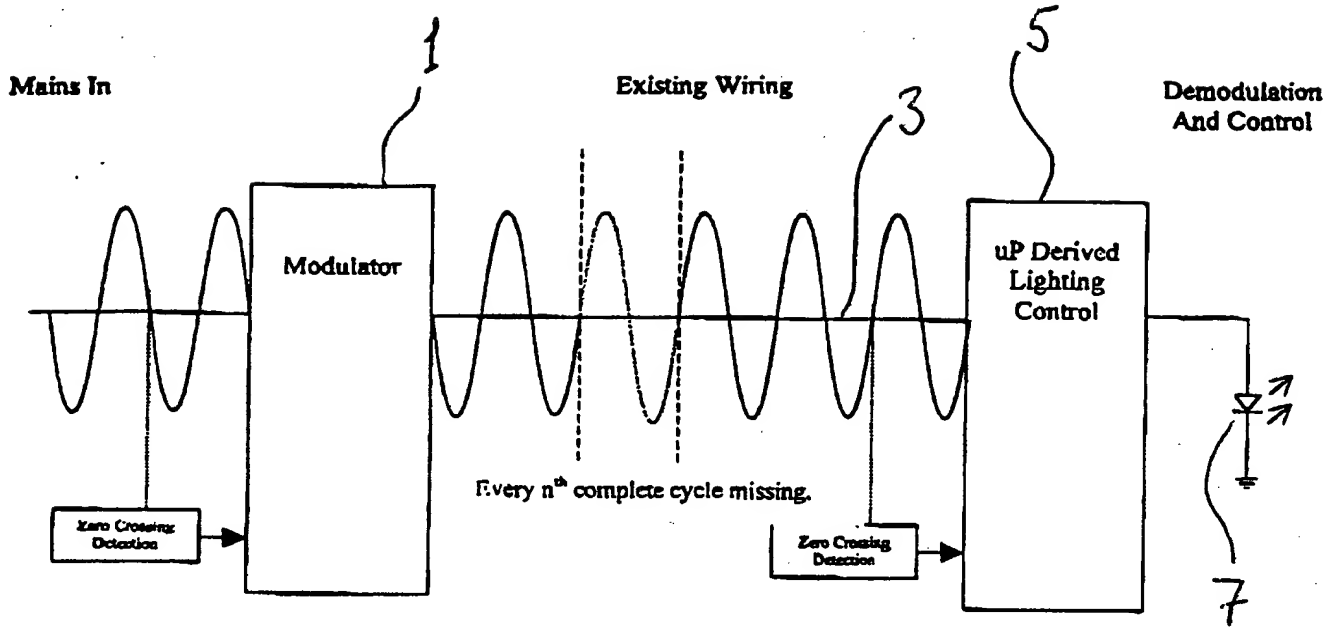


Fig.1